



### APPLICATIONS


- Building exteriors
- Light Industrial
- General Lighting
- Area Lighting
- Task Lighting
- Yard Lighting
- Low/Medium/High Mounting Applications

The FLE Series is best suited for flood light applications. Utilizing high-performance LED's and visually aesthetic construction, this fixture is a great solution for replacing any older style HID floods.


### TECHNICAL SPECIFICATIONS

VOLTAGE	120-277V / 347-480V **Available in 12-24VDC
POWER FACTOR	≤95%
LED LUMINOUS EFFICIENCY	120 lm/w
MAX LUMEN OUTPUT	27,862 lm
COLOUR TEMPERATURE	3000k-57000k
COLOUR RATING INDEX	Ra>80
LENS	Poly-Carbonate
PROTECTION	IP 65
FREQUENCY	50/60Hz
LED CHIP	Philips 3030
LED DRIVER	Meanwell
MAXIMUM INTENSITY ANGLE	90° x120°
WORK TEMPERATURE	-40 to +40
WORK HUMIDITY	15% to 95% RH
CHIP LIFE EXPECTANCY	80,000 Hours
FIXTURE	Alluminum Alloy Housing
WEIGHT	1.45kg-9.5kg
APPROVED	cULus Certified

### DIMENSIONS

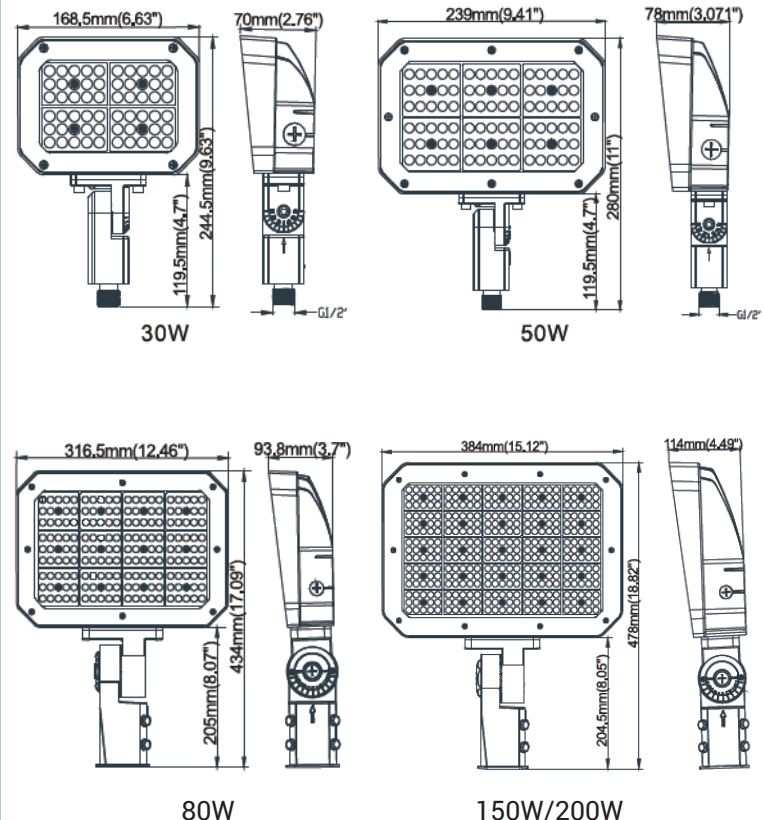

### OPTICS

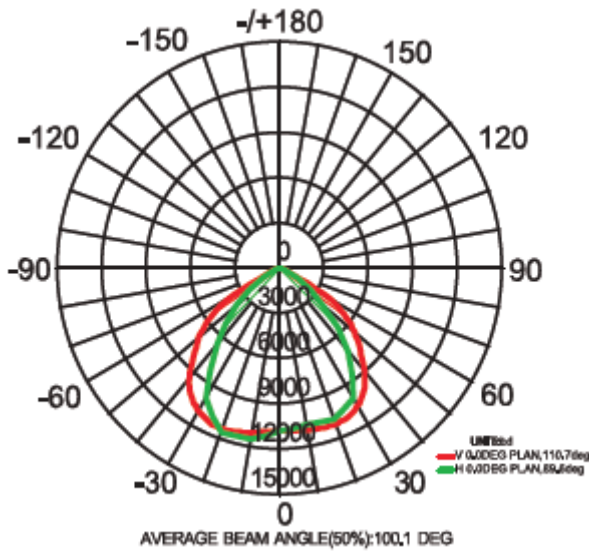

120°

### MOUNTING



SLIP FITTER  
(SF)



TRUNNION MOUNT  
(MT)



STANDARD BRACKET  
(MS)

### ORDERING INFORMATION

PART NUMBER EXAMPLE: LS - FLE - 30W - MV - 5K - W7 - MS

WATTAGE	VOLTAGE	COLOUR TEMP	CABLE	MOUNTING
30W	MV 120-277V	5K 5000K (STANDARD)	W7 7' WHIP	MS STANDARD BRACKET
50W	HV 347-480V	4K 4000K	W(X) CUSTOM	MT TRUNNION MOUNT
80W	VDC 12-24VDC	3K 3000K		SF SLIPFITTER
150W				
200W				