

**CLASS I, DIV. 2 GROUPS A,B,C,D - T3**  
**CLASS II, DIV. I, GROUPS E,F,G / DIV. 2 GROUPS E,F,G - T3**  
**CLASS III - T3**

**APPLICATIONS**

- Oil & Gas Facilities
- Electrical Buildings
- Mining Environments
- Forestry Facilities
- Indoor / Outdoor Applications
- Harsh Conditions
- Processing Facilities
- Manufacturing
- Hazardous Areas




-40°C / +60°C

The HLL Series Linear Light is the perfect solution for low mounted lighting applications requiring low clearance. This fixture provides high output LED's along with high-quality construction offering industry leading performance and durability for your hazardous area lighting needs.

**TECHNICAL SPECIFICATIONS**



VOLTAGE	120-277V or 347-480V
POWER FACTOR	<95%
LED LUMINOUS EFFICIENCY	140 (LM/W)
MAX LUMEN OUTPUT	8100 LM
COLOUR TEMPERATURE	4000-5700K
COLOUR RATING INDEX	Ra>70
LENS	Optical Poly-Carbonate
PROTECTION	IP66
FREQUENCY	50-60 Hz
LED CHIP	Phillips
LED DRIVER	Meanwell
MAXIMUM INTENSITY ANGLE	120°
WORK TEMPERATURE	-40°C to +60°C
WORK HUMIDITY	15% to 95% RH
CHIP LIFE EXPECTANCY	80000 Hrs
FIXTURE	Aluminum Alloy Housing
WEIGHT	4Kg-5.5Kg
APPROVED	ETL Listed / Tested To CSA and UL Standards

**DIMENSIONS**

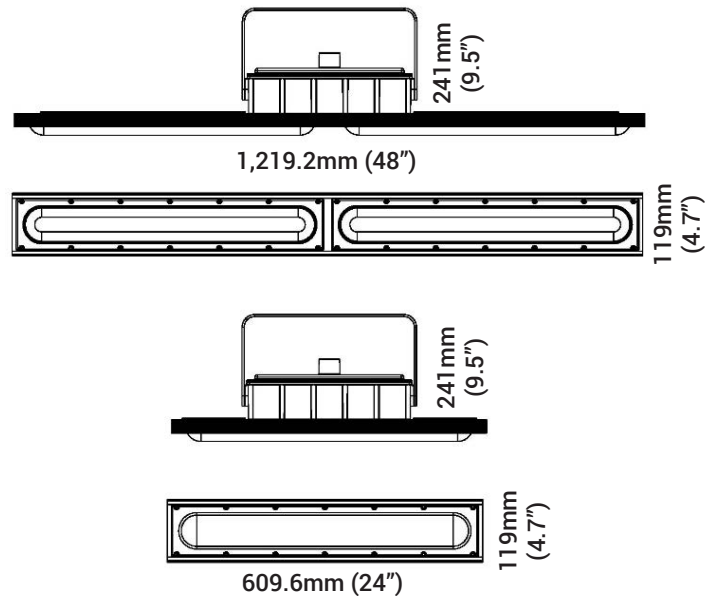

**OPTICS**

**PHOTOMETRIC RENDERING (30W / 120°)**

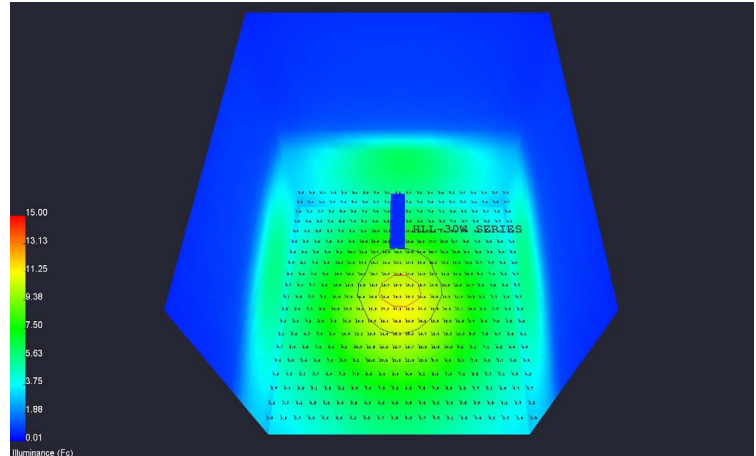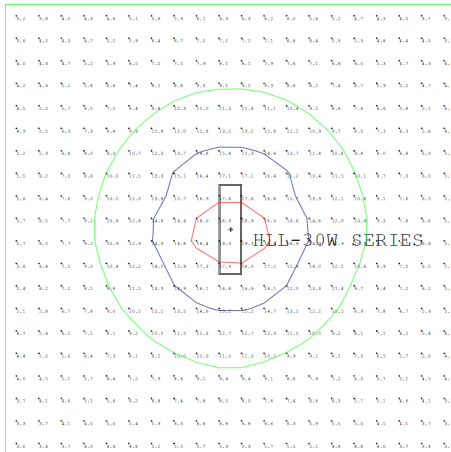

Room Dimensions: 20' x 20' x 20'  
Fixture Mounted @ 12'

**MOUNTING**



**STANDARD BRACKET**  
(BS)



**PENDANT**  
(MP)

**ORDERING INFORMATION**

**PART NUMBER EXAMPLE: LS - HLL- 10W -L2- MV - 40 - BS - WB**

WATTAGE	LENGTH	VOLTAGE	COLOUR TEMP	MOUNTING	OPTICS
10W	L2 2' (10/20W)	MV 120-277VAC	40 4000K	BS STANDARD BRACKET	WB WIDE LENS (120°)
20W	L4 4' (40/50/60W)	HV 347-480VAC	50 5000K	MP PENDANT MOUNT	
40W			57 5700K		
50W					
60W					