

WPL SERIES

30W | 50W | 80W | 100W

General Rated LED Wall Pack Light

UL1598 general rated wall light designed for Heavy Industrial environments
High Lumen Output
Optimized Retrofit Accessories Designed for industrial applications



-40°C | +40°C

Key Applications

- Building exteriors
- Commercial stores
- General Lighting
- Area Lighting
- Task Lighting
- Walkways
- Low/Medium Mounting

Compliances

UL/cUL Listed to:

- UL 1598 Suitable for Wet Locations

IP65



Specifications

Voltage	120-277V or 347-480V
Power Factor	<95%
Efficacy	120 Lumens/Watt
Lumen Output	LS-WPL-30W: 3,600 LM LS-WPL-50W: 6,000 LM LS-WPL-80W: 9,600 LM LS-WPL-100W: 12,000 LM
Colour Temp.	5000K Standard Custom CCT Available
CRI	RA>80
Frequency	50-60Hz
LED Diodes	Phillips
Power Supply	Meanwell
Optics	120°
Operating Temp	-40°C to +40°C
Weight	LS-WPL-30W = 3 Lbs LS-WPL-50W = 3 Lbs LS-WPL-80W = 8 Lbs LS-WPL-100W = 8 Lbs
Connections	1/2" NPT
Mounting	Wall Mount (Standard)
Warranty	5 Year Standard

For IES files, see website or contact Lumisave




WPL SERIES

General Rated LED Wall Pack Light



Dimensions

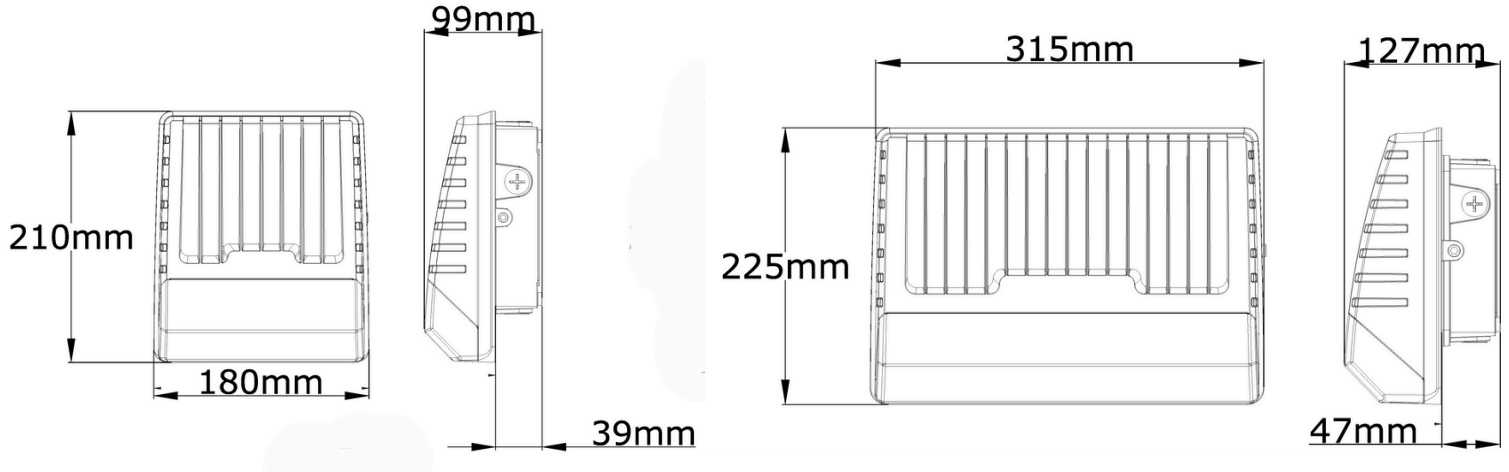

30W / 50W

80W / 100W

Ordering Information

Example: LS-WPL-30W-MV-5K

Model	Wattage	Voltage	Colour Temp
LS-WPL	30W	MV	5K
	50W	HV	CTM
	80W		
	100W		

Wattage	Voltage	Colour Temp
30W	MV 120-277VAC	50K 5000K (Standard)
40W	HV 347-480VAC	CTM 3000K - 4000K
50W		
60W		
65W		
75W		

Notes

- 1 Special project pricing and support available upon inquiry
- 2 Product customization available upon consultation